


* DIMENSIONS TO BE DETERMINED BASED UPON CAPACITY AND STRUCTURAL REQUIREMENTS

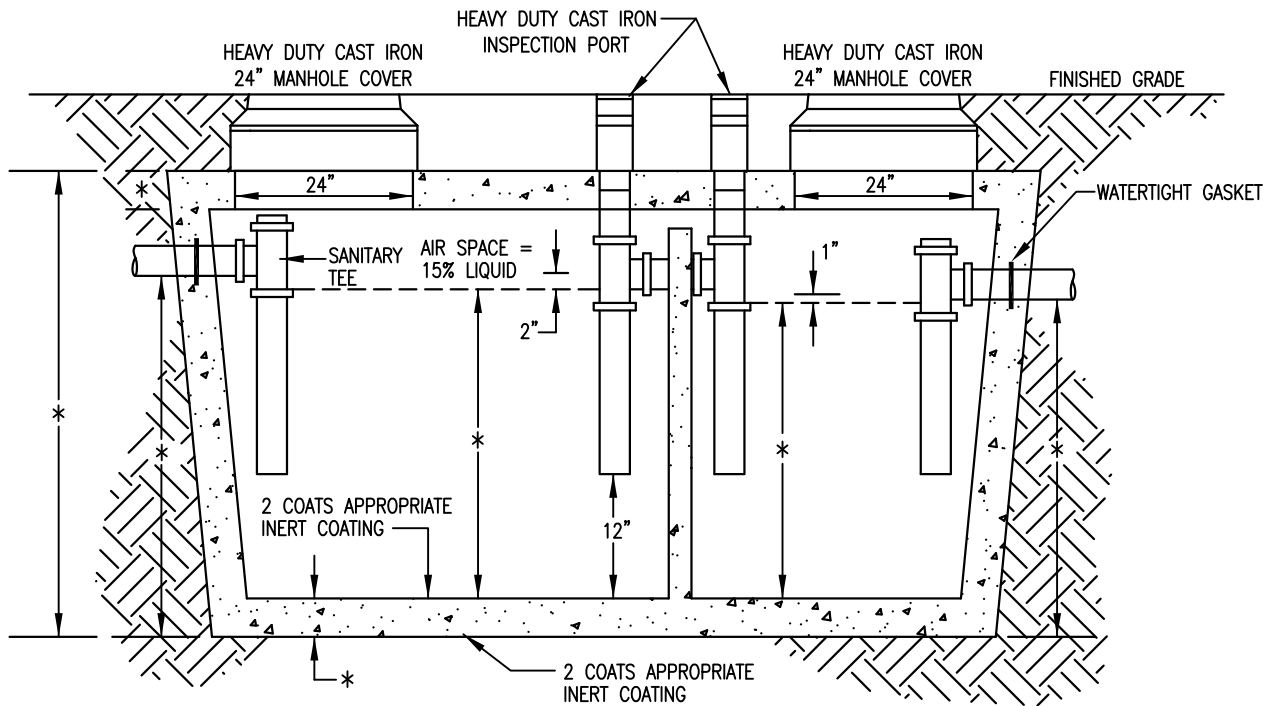

H-20 LOADING PER ASTM A 615-57T
 4000 PSI CONCRETE
 3/4 REBAR @ 6" O.C., WELDED EACH WAY

OPENINGS MAY BE CAST TO SUIT
 BAFFLES @ 25% LIQUID LEVEL

EXTERIOR GREASE TRAP/OIL SEPARATOR DETAIL

N.T.S.

MONTGOMERY TOWNSHIP
 MUNICIPAL SEWER AUTHORITY
 REF. NO. 8400-76

CKS Engineers, Inc.

88 South Main Street, Doylestown, PA 18901
 (215) 340-0600